


| Run Description | |
|-------------------|------------------|
| Run ID | bm25_desc |
| Task | Ad Hoc Retrieval |
| Run type | Automatic |
| Topic fields used | Description |

| Mean measures | | |
|---------------|--------------------------------|--------|
| Measure | Qrels | Score |
| cam_map | correct-credible | 0.1900 |
| cam_map | useful-credible | 0.2756 |
| cam_map_three | 3aspects | 0.2358 |
| ndcg | binary.useful | 0.6047 |
| ndcg | binary.useful-correct | 0.4951 |
| ndcg | binary.useful-credible | 0.5742 |
| ndcg | binary.useful-correct-credible | 0.4831 |
| compatibility | graded.harmful-only | 0.1247 |
| compatibility | graded.helpful-only | 0.3660 |

Per-topic difference from median cam_map_three using 3-aspects qrels

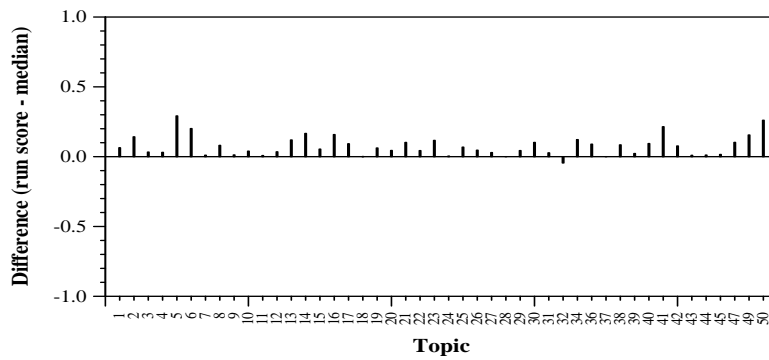

Per-topic difference from median NDCG using binary.useful-correct-credible qrels

